




Kanalvifte

MR104192

RS125




- Bakoverbøyde skovler
- Hus i lakkert stål, RAL 7035
- Trafo- eller elektronisk regulering
- Intrigert termokontakt

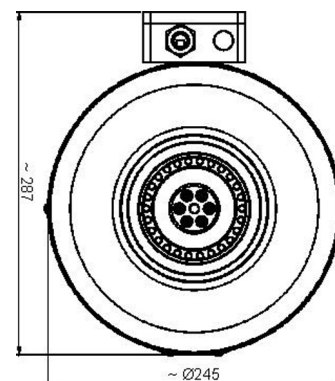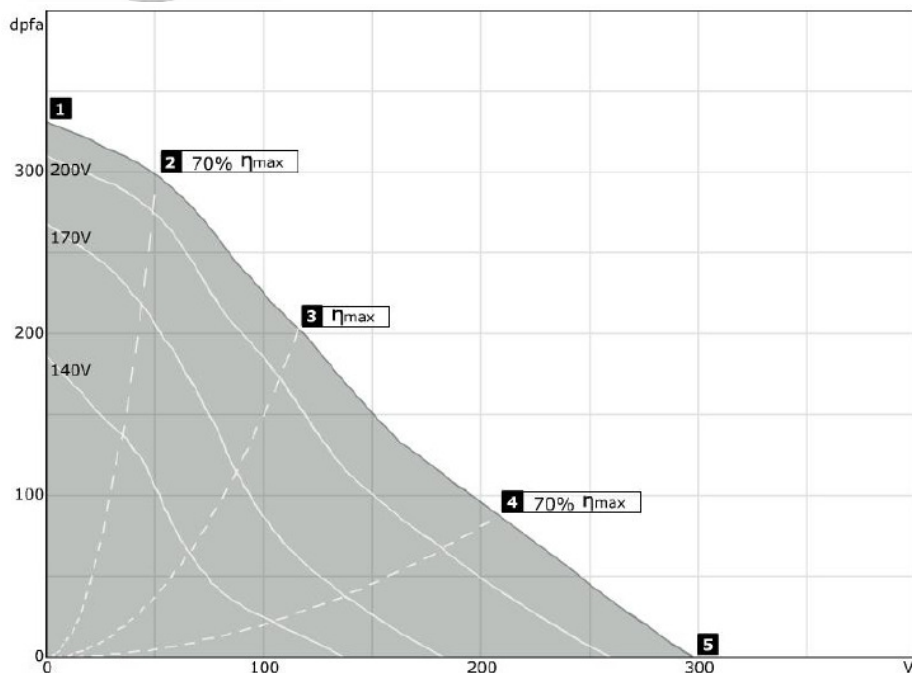

230V 50Hz

Drifts punkt		1	2	3	4	5
Strøm	A	0,20	0,21	0,22	0,24	0,25
Effekt	W	43	45	49	55	55
Turtall	1/min	2630	2580	2370	2140	2120
SPL innløp LWA5	dB(A)	-	61	60	60	60
SPL utløp LWA6	dB(A)	-	61	60	59	59
SPL omgivelse LWA2	dB(A)	-	55	53	51	49

Spenning U _n	230V ~	Turtallsregulering	V
Effekt	55 W	Motorvern	TMI
Strøm I _n	0,3 A	Capacitor	1µF/450 V
Strøm I _{max}	0,3 A	Beskyttelsesklasse	F
Omgivelses temp t _u	80 °C	Poler	2
Maks. temp transport luft	80 °C	Vekt	2,63 kg

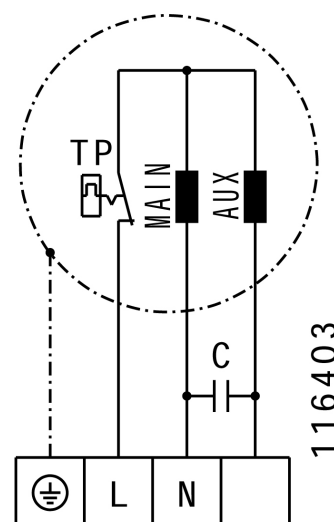

Tilbehør til RS125

MTY0

Trinnløs regulator



TE 1,0

5-trinn trafo



TEU 1,5

2x5-trinn trafo



MRS 1

Montasje brakett

