




Kanalvifte

MR104194

RS125L




- Bakoverbøyde skovler
- Hus i lakkert stål, RAL 7035
- Trafo- eller elektronisk regulering
- Intrigert termokontakt

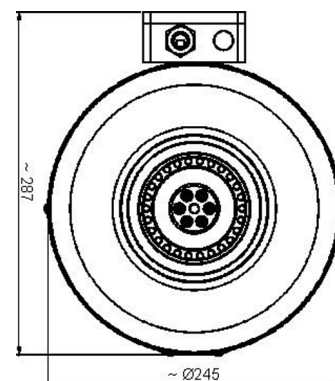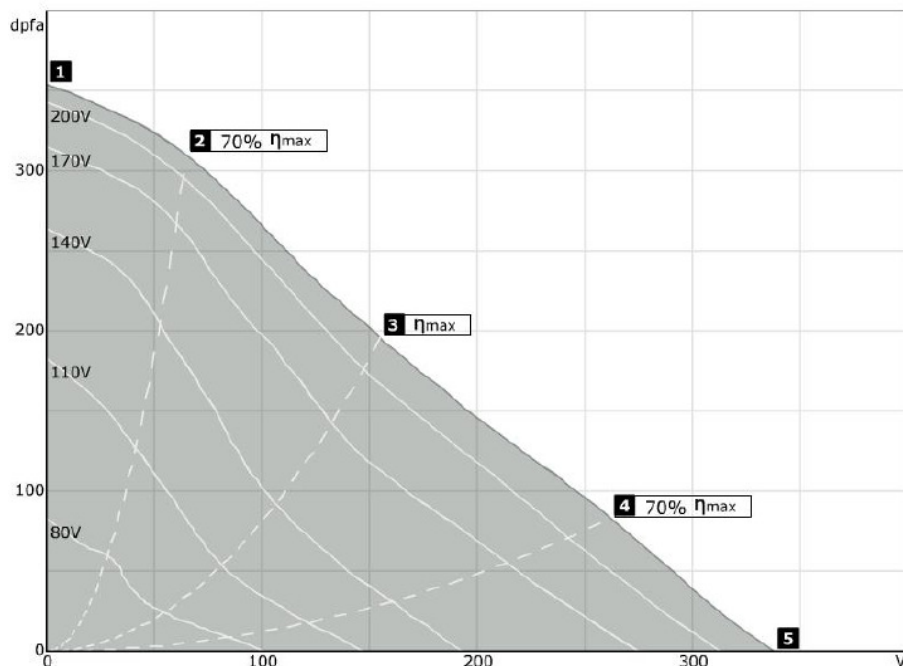

230V 50Hz

Drifts punkt		1	2	3	4	5
Strøm	A	0,27	0,27	0,29	0,29	0,29
Effekt	W	60	60	65	65	65
Turtall	1/min	2730	2670	2500	2390	2400
SPL innløp LWA5	dB(A)	-	-	65	66	68
SPL utløp LWA6	dB(A)	-	-	65	65	67
SPL omgivelse LWA2	dB(A)	-	-	44	44	45

Spenning U _n	230V ~	Turtallsregulering	V
Effekt	55 W	Motorvern	TMI
Strøm I _n	0,3 A	Capacitor	2µF/450 V
Strøm I _{max}	0,3 A	Beskyttelsesklasse	F
Omgivelses temp t _u	65 °C	Poler	2
Maks. temp transport luft	65 °C	Vekt	2,62 kg

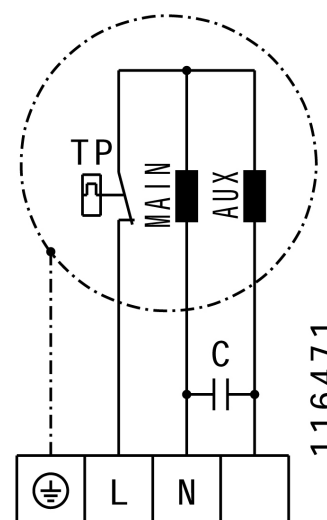

Tilbehør til RS100

MTY0

Trinnløs regulator



TE 1,0

5-trinn trafo



TEU 1,5

2x5-trinn trafo



MRS 1

Montasje brakett

