




# Kanalvifte

# MR104205

# RS315




- Bakoverbøyde skovler
- Hus i lakkert stål, RAL 7035
- Trafo- eller elektronisk regulering
- Intrigert termokontakt

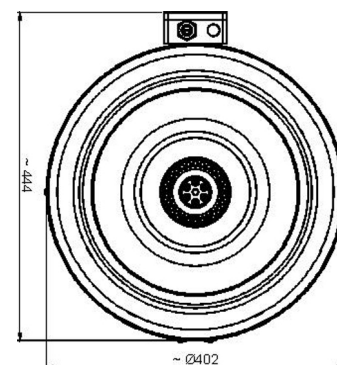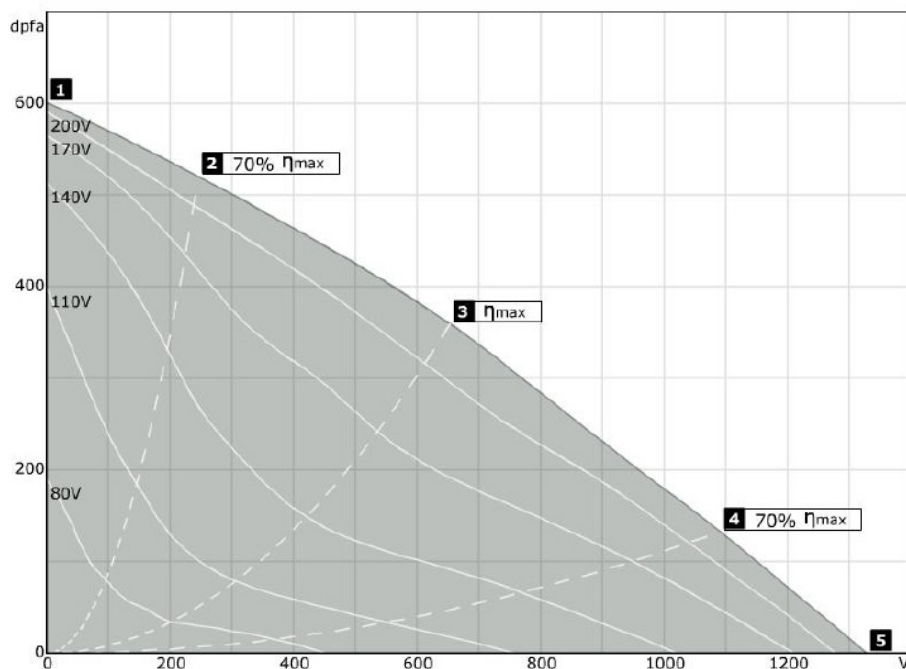

## 230V 50Hz

Drifts punkt		1	2	3	4	5
Strøm	A	0,59	0,69	0,85	0,77	0,68
Effekt	W	125	150	190	170	150
Turtall	1/min	2810	2680	2490	2590	2690
SPL innløp LWA5	dB(A)	-	69	70	74	76
SPL utløp LWA6	dB(A)	-	72	73	79	80
SPL omgivelse LWA2	dB(A)	-	54	54	58	60

Spenning $U_n$	230V ~	Turtallsregulering	V
Effekt	190 W	Motorvern	TAI
Strøm $I_n$	0,9 A	Capacitor	5µF/450V
Strøm $I_{max}$	0,9 A	Beskyttelsesklasse	F
Omgivelses temp $t_u$	60 °C	Poler	2
Maks. temp transport luft	60 °C	Vekt	5,55 kg

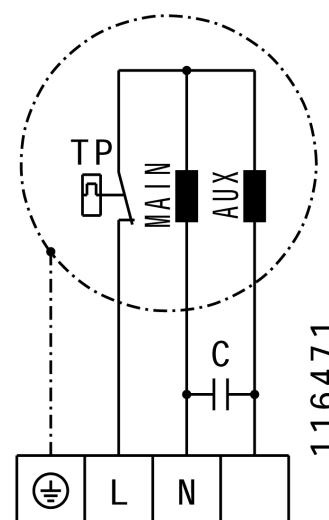

## Tilbehør til RS315

### MTY1

Trinnløs regulator



### TE 1,0

5-trinn trafo



### TEU 1,5

2x5-trinn trafo



### MRS 2

Montasje brakett

